

ELECTRICAL CHARACTERISTICS:

R25C=10,000 OHMS ±10%

<100mA CURRENT DRAW


MECHANICAL CHARACTERISTICS:

LEADS:
#24AWG BELDEN CABLE, 7/32 STRANDED
HI FLEX, BLACK JACKET.
QTI P/N: QT01002-238

BELDEN P/N: 1508A

HOUSING:
316 SS L=2.02" X .187" W/ .015" WALL THICKNESS
QTI P/N: QT01005-002

NOTES:
HEATSHRINK ADDED OVER HOUSING
AND CABLE

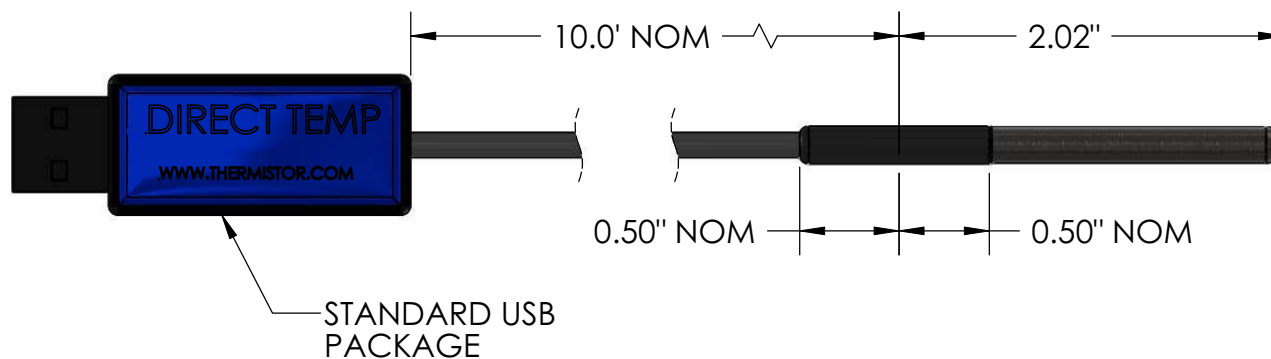

	INITIAL	DATE
DRAWN	BR	6/24/09
ENG APPR.	<i>Greg Kochauer</i>	06 25, 2009
MAT APPR.	<i>John Lange</i>	Jun 24, 2009
Q.A. APPR.	<i>D. & M.</i>	Jun 24, 2009



2108 CENTURY WAY
BOISE, ID 83709
WWW.THERMISTOR.COM

QTI PART NUMBER: **DTU6005-001** REV **A**

SIZE **A** DWG. NO. **DTU6005-001.SLDDRW**

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/8
.X ±0.1
.XX ±0.02
.XXX ±0.005

DATE	REVISION	INITIAL
6/24/09	A	BR
01/29/09	-	BR

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
QUALITY THERMISTOR, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
QUALITY THERMISTOR, INC. IS PROHIBITED.